


CORRUGATED Roof and Wall



Corrugated roofing has been used in domestic and industrial applications for over 100 years and is still very popular today. Corrugated is available in a wide range of colours and is suitable for roof and wall on contemporary homes. Galvanised roofing is also available for the old traditional roof.

Product Details

Profile

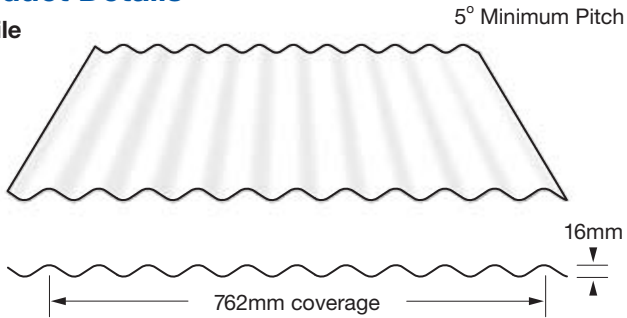

Material Specification

0.42 or 0.48	Zincalume®	G550 AM125
0.42 or 0.48	Galvanised	G550 Z450
0.42 or 0.48	Colorbond®	G550 AM100

Special Orders


Stainless Steel, Metallic, Coolmax and Ultra

Product Mass

BMT		kg/m ²
0.42	Zincalume®	4.24
0.42	Colorbond®	4.27
0.42	Galvanised	4.65
0.48	Zincalume®	4.81
0.48	Colorbond®	4.85
0.48	Galvanised	5.23

Wind Load Conversion

Wind Classification	Region & Category
(Domestic)	(Commercial/Industrial)
N1 (W28)	Reg A, Cat 3
N2 (W33)	Reg A, Cat 2.5 - Reg B, Cat 3
N3 (W41)	Reg A, Cat 2 - Reg B, Cat 2.5
N4 (W50)	Reg B, Cat 2

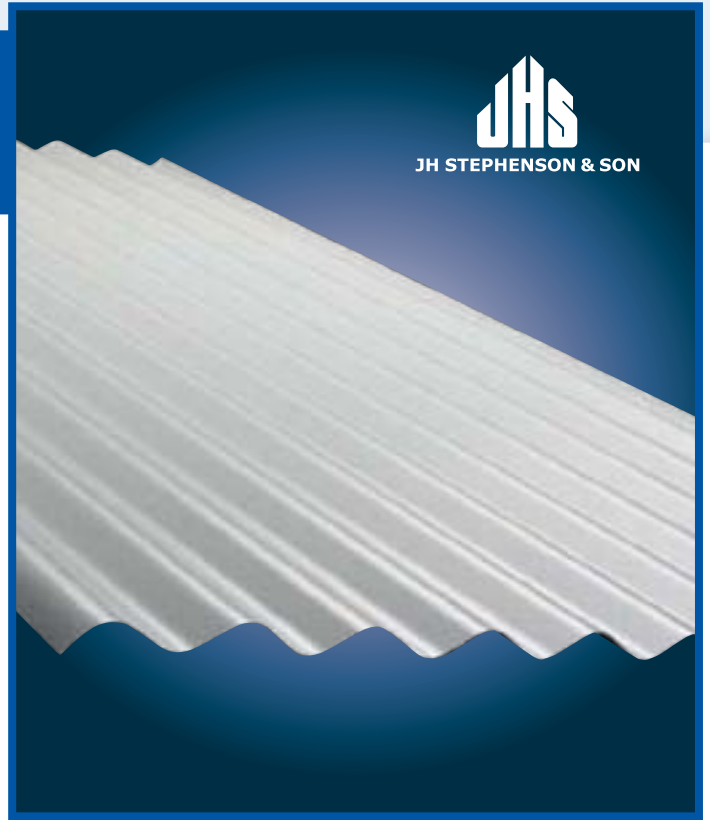

Maximum Support Spacings (mm)

Type of Span	Thickness (mm)	BMT
	.42	.48

ROOFS

Single Span	700	800
End Span	900	1300
InternalSpan	1200	1700
Unstiffened Eaves Overhang	150	200

WALLS

Single Span	1500	1600
End Span	1500	1800
InternalSpan	1800	2100
Overhang	200	200

Maximum Support Spacing has been determined by load tests and deflection in accordance with AS 1562-1 AS 4040 1 & 2 1992.

