


# NAILSTRIP 25 & 38

JH STEPHENSON  
CLASSIC EURO PANEL RANGE  
ROOF OR WALL CLADDING

**NAILSTRIP** is available in 25mm and 38mm Rib Heights. It is easy to install using screws every 300mm along the panel's perforated edge. The joining panel snaps over the low rib with no mechanical seam locking required.

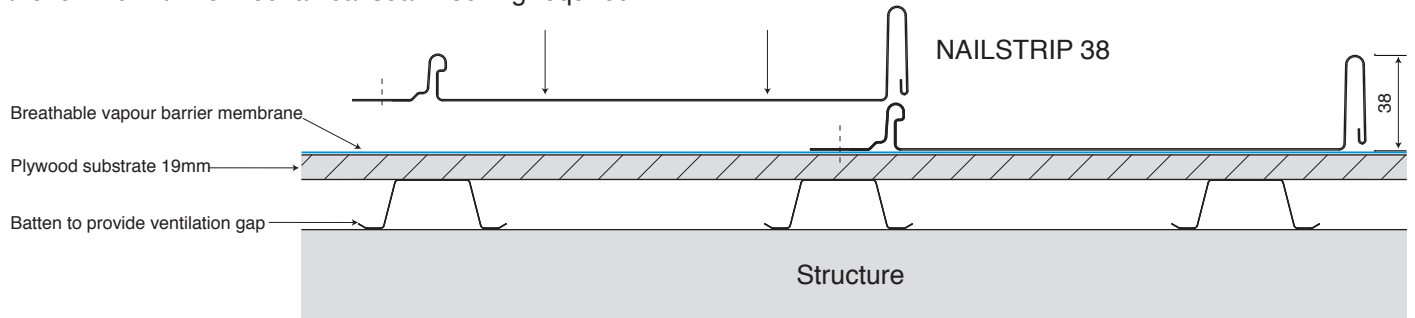

## Preparation

The substrate must be flat and rigid where the panels are laid. Battens are required between the structure and the ply to create a ventilation gap to prevent condensation. Procter wrap, a breathable barrier membrane, is required between the substrate and the Nail Strip panel.

## Material Availability

- Colorbond®
- Colorbond® Ultra
- Colorbond® Metallic
- Colorbond® Matt
- Galvanised

## Standard NailStrip Specifications

	Rib Height 25mm		Rib Height 38mm	
Rib Height and Cover	25 x 185	25 x 285	38 x 255	38 x 315
NailStrip Length	- 1.0 - 4.0 Recommended Max			
Minimum Pitch	- 7.5° Roof			
Custom Widths	- Available on request			
Notching	- 20mm Rib cut back as requested			
Stop Ends	- Fold up, Fold down, Fold Hook			
Screws	- Wafer 10 -12 x 25 Timber			



Colorbond®



Phone 03 5274 6222 [www.jhstephenson.com.au](http://www.jhstephenson.com.au)



Established 1923